


ST.G/8 REL

Modulo relè manuale d'installazione /
Relay module installation manual



Manuale / Manual

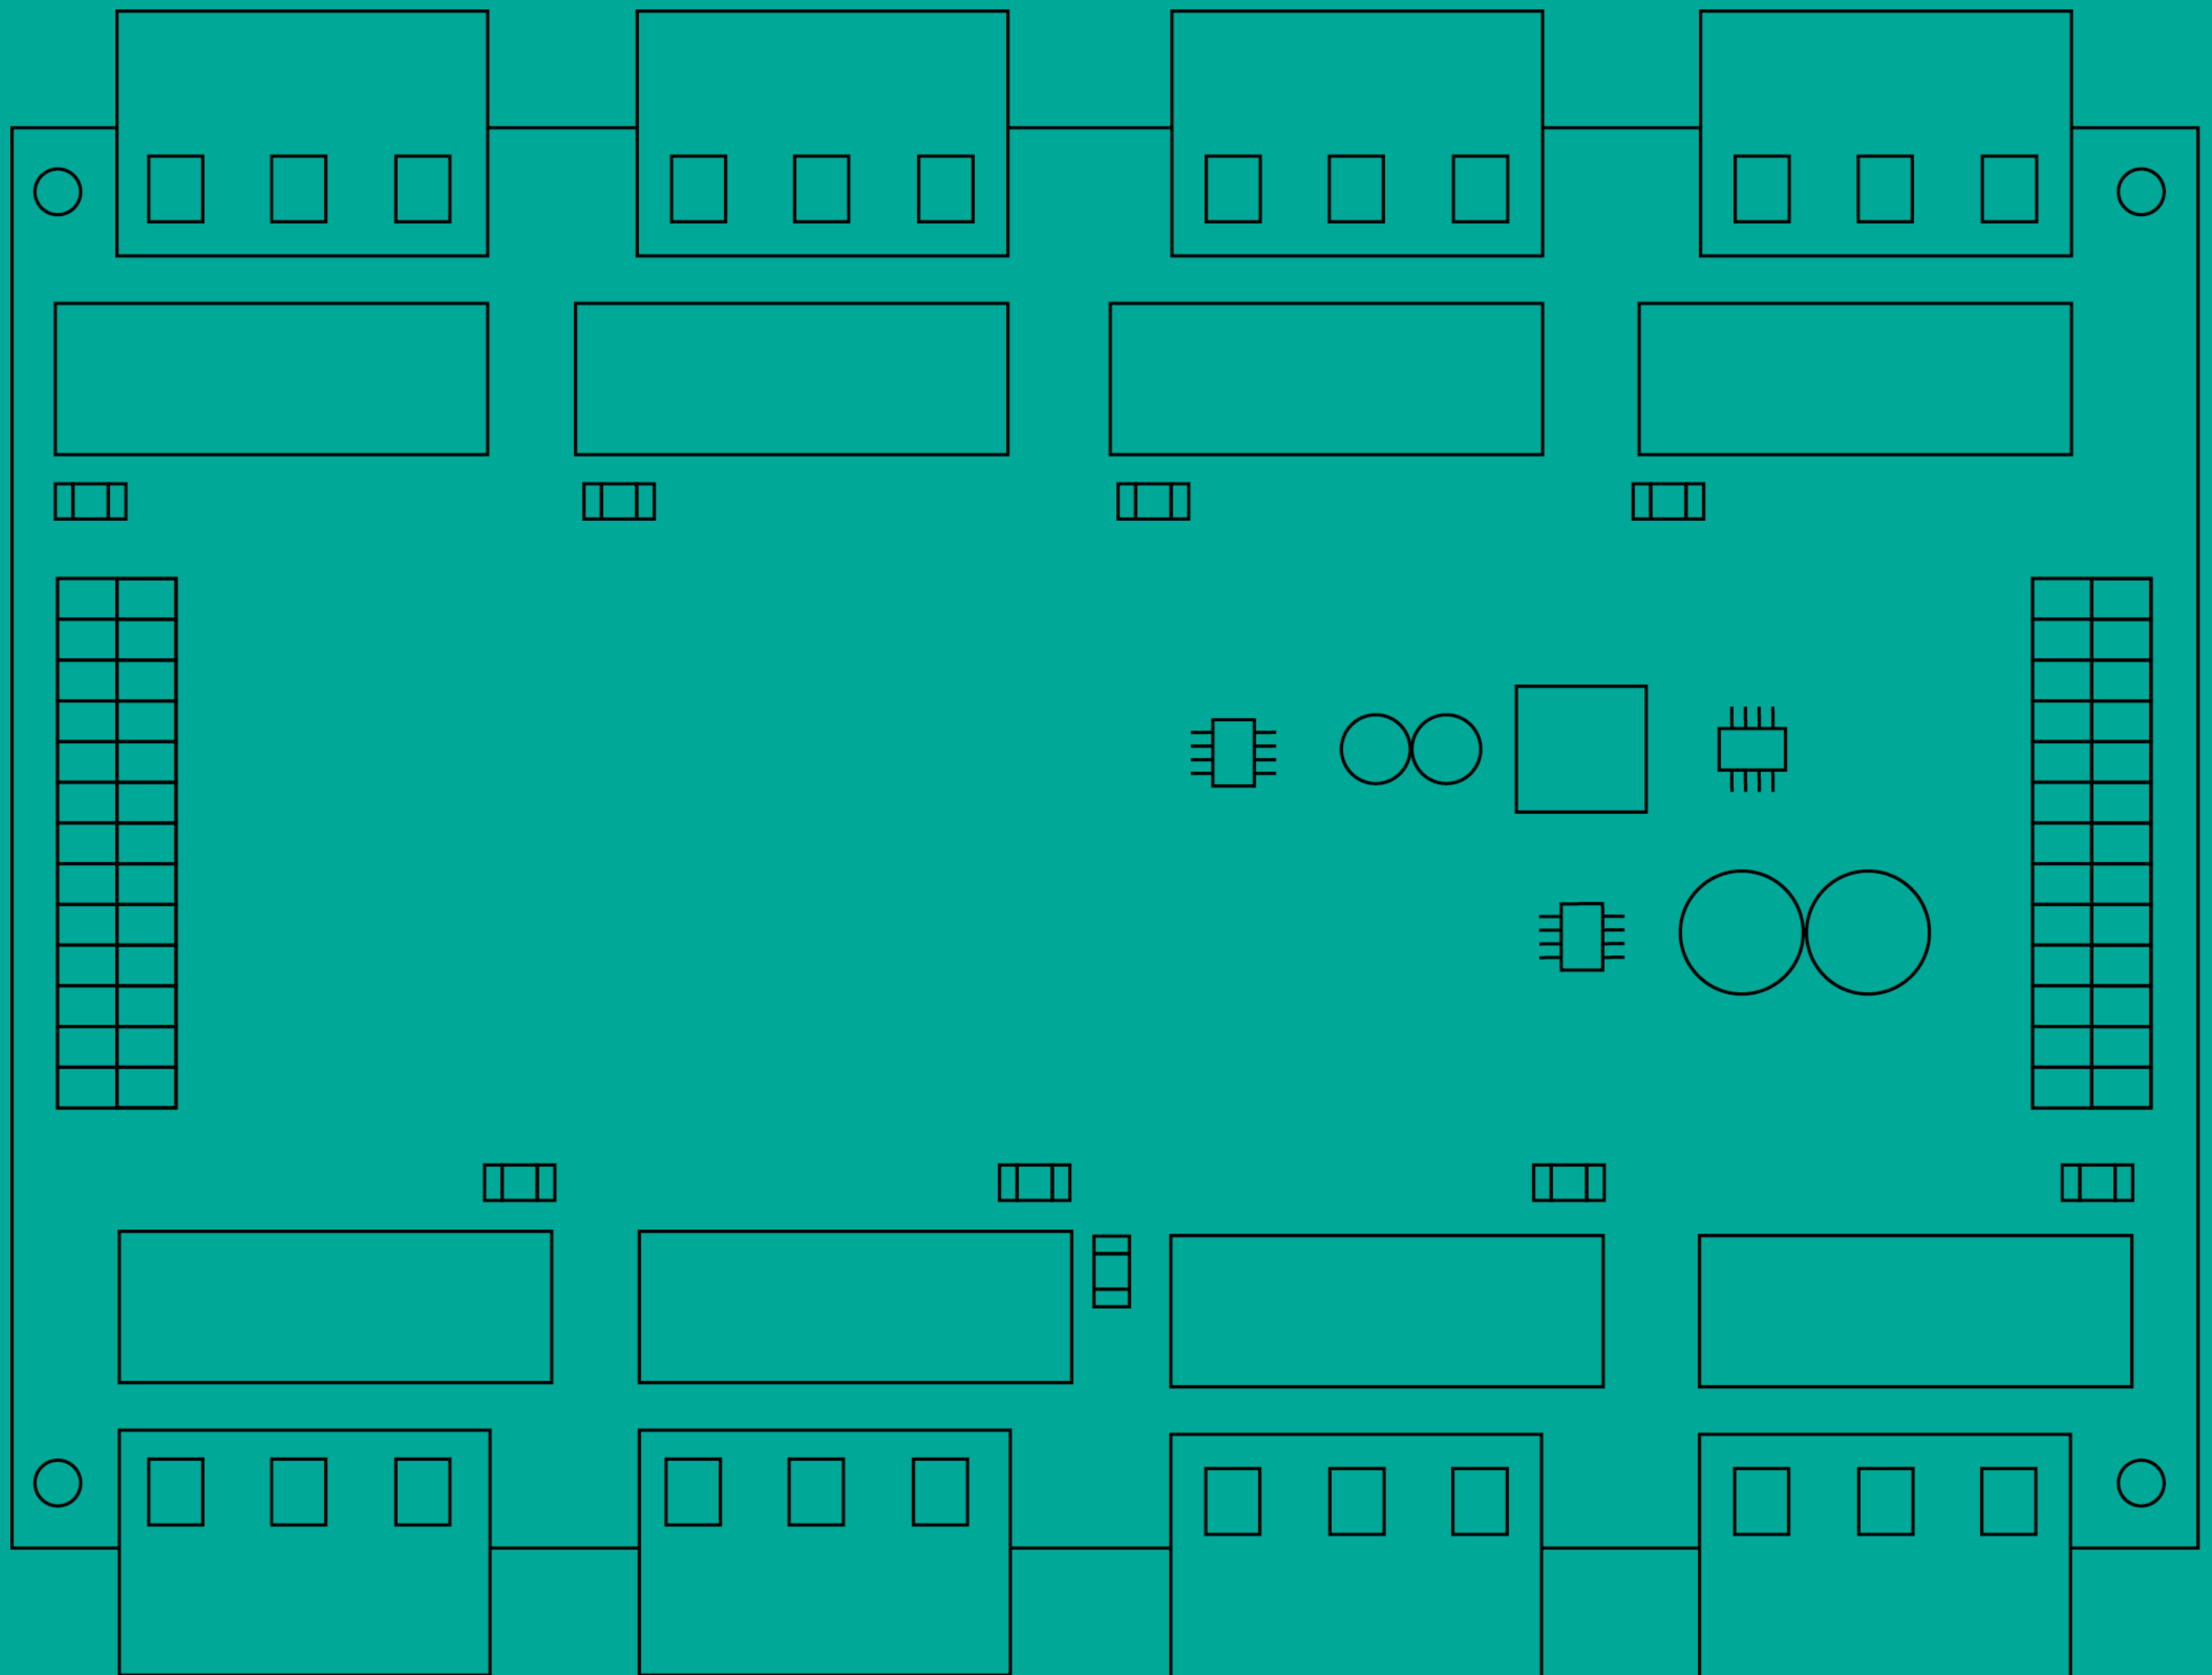




Descrizione

La scheda espansione opzionale 8 relè STG/8REL converte in contatti di scambio liberi da tensione le uscite O/C del modulo di uscita STG/OUT16 "S". A ciascun modulo di uscita possono essere collegate fino a due schede relè. Una scheda relè viene collegata direttamente al modulo di uscita (connettore J1) ed una seconda scheda relè viene collegata alla prima.

Nota: La scheda relè STG8REL è compatibile solo con i moduli STG/OUT16 "S" e "PK"

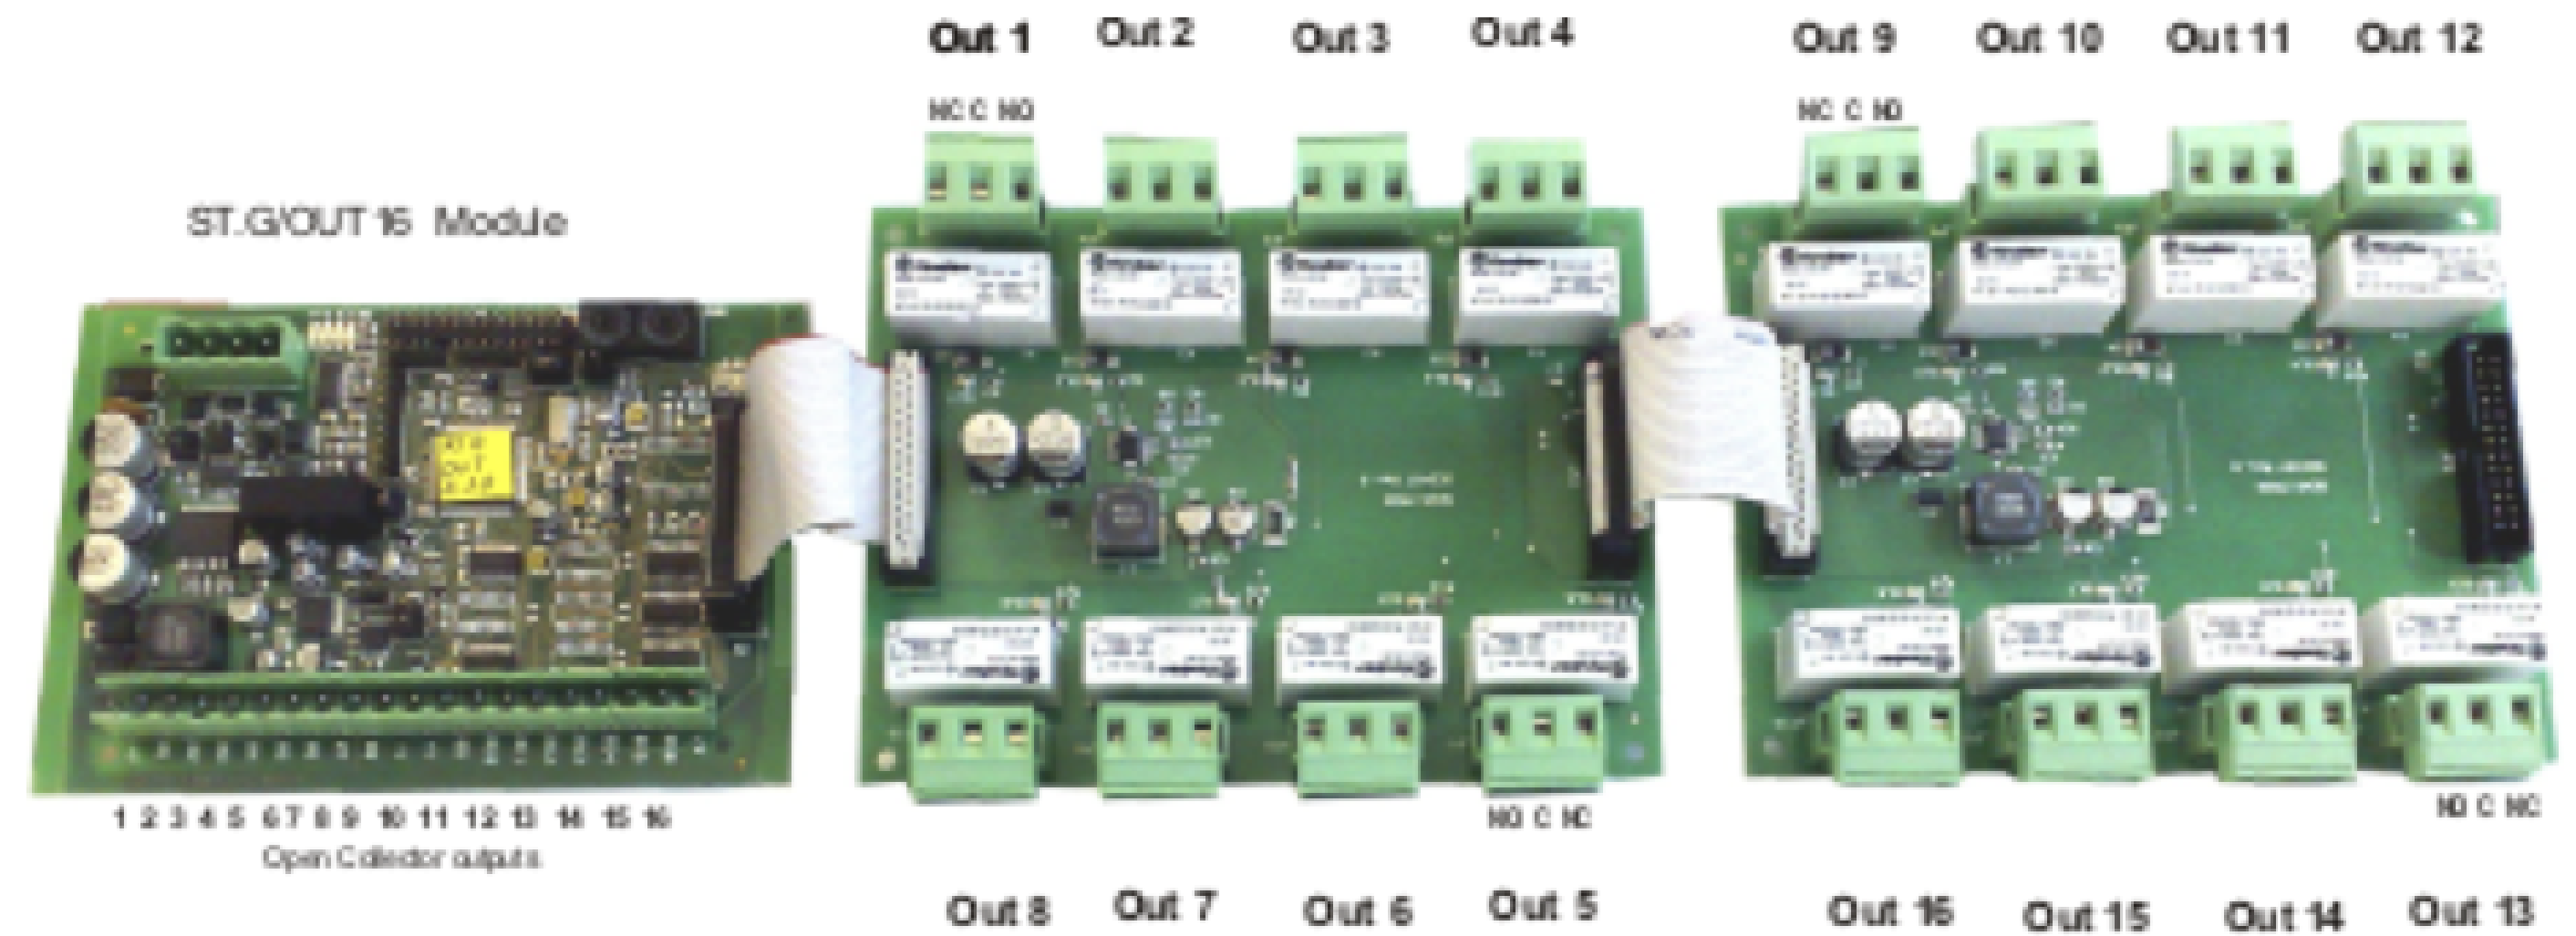

Caratteristiche tecniche


Portata contatti relè	16 A a 250 Vca
Temp. funzionamento	0-50 C°
Umidità	15-85% non condensante
Dimensioni	144 x 107 x 25 mm



Description

The STG/8REL 8-relay optional expansion board converts STG/OUT16 “S” O/C outputs into voltage free changeover contact. Up to two relay boards can be connected to each output module. A relay board is directly connected to the output module (J1 connector) and a second relay board is connected to the first.

Note: The STG8REL is compatible just with the STG/OUT16 “S” and “PK” modules.

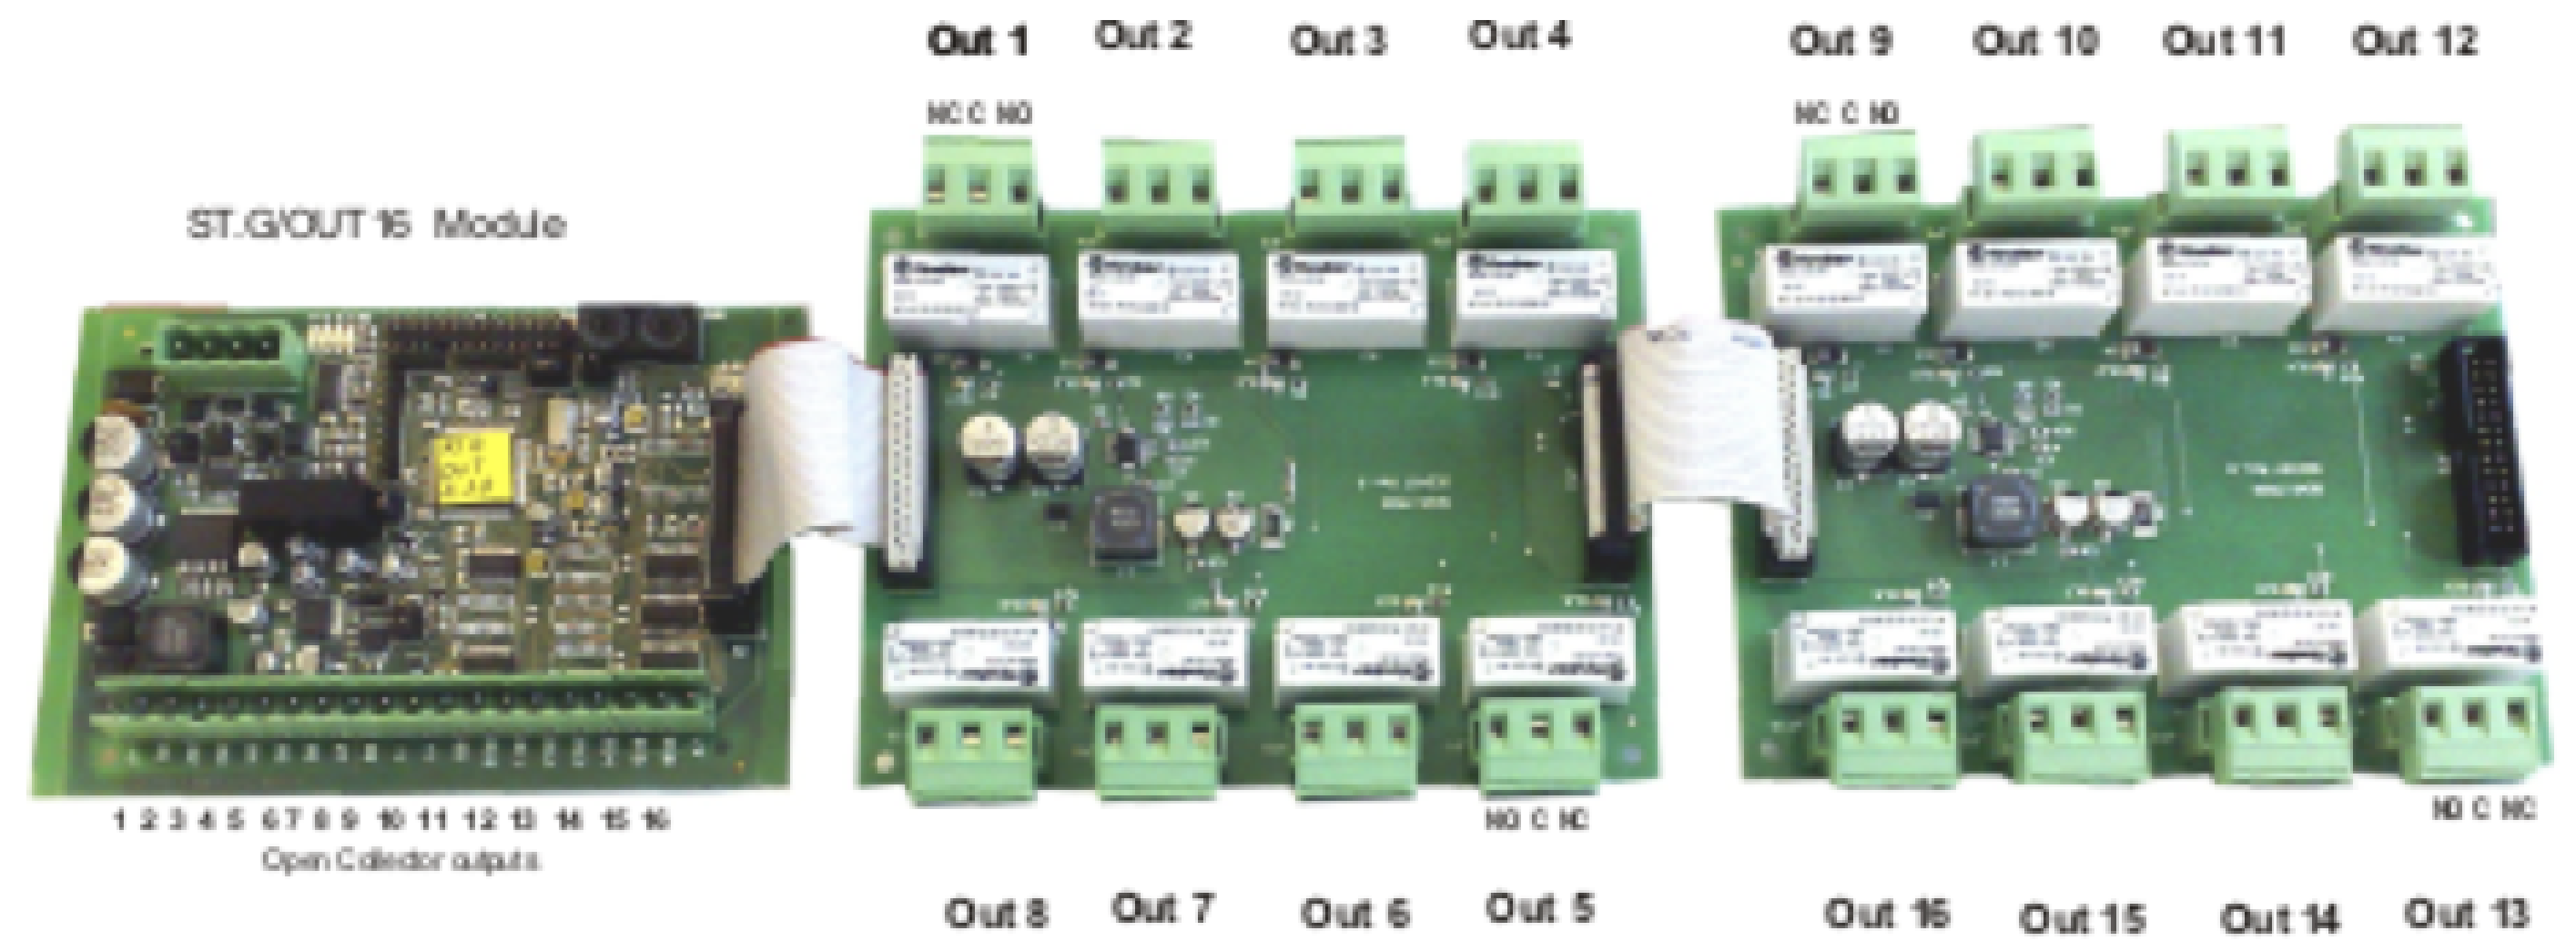

Technical specification

Contacts rating	16 A a 250 Vca
Operating temperature	0-50 C°
Humidity	15-85% non condensing
Dimensions	144 x 107 x 25 mm

Contatti/Contacts

Viale della Repubblica, 48
20007 Cornaredo (MI) – ITALY

+39 0293548155
sales@sensitron.it
sensitron.it

Sensitron S.r.l.

