#### **SMART S**

Designed for harsher and more aggressive environments



- Flammable, toxic, CO2,
  VOC and refrigerant gas
- Catalytic, infrared, electrochemical cell and PID sensors
- Flammable and refrigerant gas
- Catalytic and infrared sensors



















### **SMART S-SS DETECTOR**



- Available for flammable, toxic, CO2, VOC and refrigerant gas
- 4-20mA, RS485, relay, HART modem
- HW SIL2 and SW SIL3, ATEX cat. 2 explosion-proof and IS, IECEx
- LED display

SIL2 (3)









### **SMART S-MS DETECTOR**



- Available for flammable and refrigerant gas
- 4-20mA, RS485, relay
- HW SIL2 e SW SIL3, ATEX cat. 2, IECEx, CCS and MED

SIL2 (3)









# Gas relevation in heavy industry



### System:

• SMART S-SS


MULTISCAN++S2
 Control unit







## Gas relevation in marine environment

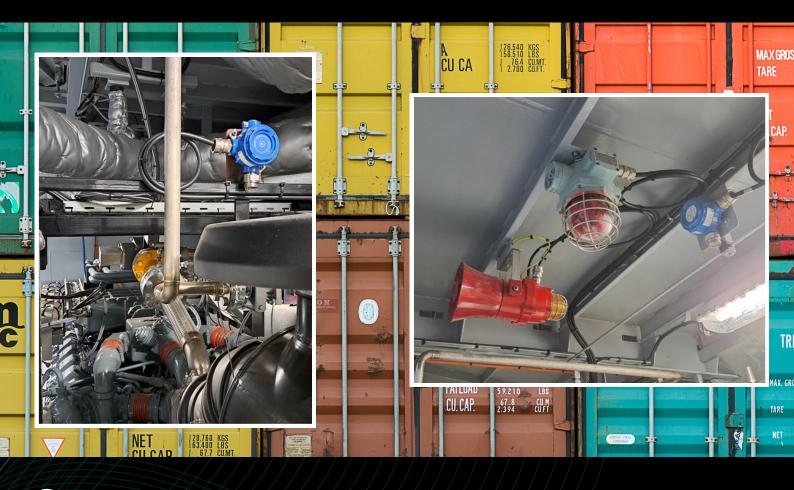

## System:

• SMART S-MS

• MULTISCAN++MED





